


Outdoor Media Advertising Screens P3.91,4.81 and 6.25

Outdoor media advertising, outdoor live event/show broadcast

A clear and vivid color display, capable of portraying the finest detail. It's revolutionary design makes it the ideal solution for large events, exhibitions, broadcasting and concert tours.

Outdoor Highest Definition Revolution

High Refresh Rate / Super Hi-Vision /
Ultra Light & Thin / Fast Installation /
Easy Maintenance / Humanized Design



Certificates:



Features :

Super thin and light cabinet design :

cabinet thickness is 77mm, weight is 12KG/cabinet ;

Seamless splice:

high-precision and high-quality CNC cabinet with precision +/- 0.05mm ;

Fast installation:

Quick install locks with three steps, push-twist-fasten.

Waterproof design

IP65 waterproof for both front and rear side;

Low failure rate:

Fully automated machine operation, reducing human damages and errors, and improve product reliability;

Zero noise design:

excellent cooling performance. With no fans, provide a quiet working environment.

High brightness:

Widely viewing angle lamp, brightness can be over 5500nits.

Multi-video player

Support video, image, flash, text etc.


Application



PRODUCT SPECIFICATIONS

Application		Fixed/Rental	Fixed/Rental	Fixed/Rental
Model		P3.91	P4.81	P6.25
Pixel Pitch	mm	3.91	4.81	6.25
Pixel Density	dot/m ²	65,410	43,264	25,600
LED Configuration		1R1G1B	1R1G1B	1R1G1B
LED Type		SMD2525	SMD2525	SMD3535
Module Size	mm	250 x 250	250 x 250	250 x 250
Module Resolution	pixels	64 x 64	52 x 52	40 x 40
Module Weight	Kg	0.5kg	0.5kg	0.5kg
Driver Mode		1/16 Scan	1/13 Scan	1/10 Scan
Brightness	nits	≥5,500	≥5,500	≥5,500
Grey Scale	bit/color	16	16	16
Refresh Rate	Hz	≥1,200	≥1,200	≥2,000
Cabinet Resolution	Pixels	128 x 256	104 x 208	80 x 160
Max Power Consumption	W/m ²	≤700	≤800	≤850
Average Power Consumption	W/m ²	233~350	266~400	290~450
Cabinet Size	mm	500 x 1,000 x 77	500 x 1,000 x 77	500 x 1,000 x 77
Cabinet Weight (Alu)		12kg	12kg	12kg
Viewing Angle	degree: H	120°	120°	120°
	degree: V	120°	120°	120°
Mini View Distance	m	4	5	6
Temperature (C)	Operating	-10°C~40°C/14°F~104°F		
	Storage	-20°C~50°C/-4°F~122°F		
Input Voltage (nominal)		100~240V		
Input Power Frequency		50Hz-60Hz		
Failure Rate		<1/100,000		
Panel Input Format		SDI, RGBHV, YUV, YC, Composite, HDMI, DVI, SD/HD-SDI ect.		
Life Time	hrs	100,000		
IP Rate		Front IP65. Rear IP54		

Led Module

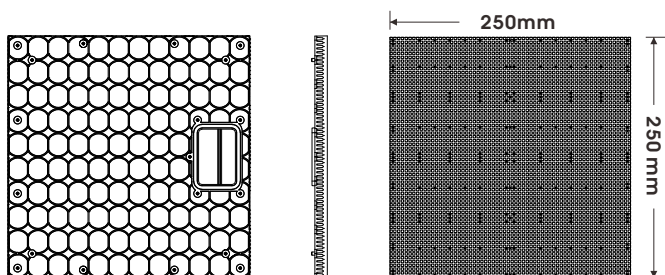

Tile

